


HIGH STRENGTH STRAPPING FOR HOLDING HOSE IN PLACE

WATER FLOW FROM PUMP

OPENING TO ACCOMODATE UP TO 4" DISCHARGE HOSE

NOTES:

1. THE DEWATERING BAG SHALL BE MADE OF NON-WOVEN GEOTEXTILE WITH A MIN. SURFACE AREA OF 225 SQUARE FEET PER SIDE.
2. ALL STRUCTURAL SEAMS SHALL BE SEWN WITH A DOUBLE STITCH USING A DOUBLE NEEDLE MACHINE WITH HIGH STRENGTH THREAD.
3. THE SEAM STRENGTH SHALL WITHSTAND 100 LB/IN USING ASTM D-4884 TEST METHOD.
4. THE GEOTEXTILE FABRIC SHALL BE A 10 OZ NON-WOVEN FABRIC.
5. DISCHARGE FROM THE DEWATERING BAG SHALL BE DIRECTED SUCH THAT PRE-DISTURBANCE HYDROLOGY IS NOT CHANGED.

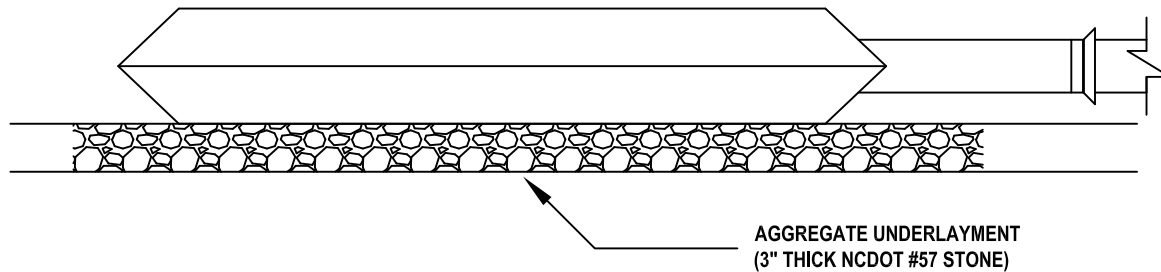

DEWATERING BAG

**CITY OF ROCKY MOUNT
DEPT. OF ENGINEERING**

APPROVED

-

STD. NO.

3.25

DATE

02-26-10

REVISION

-

REVISIONS

NO	DATE	DESCRIPTION