

NOTES:

MARKER HAS HIGH IMPACT RESISTANCE DUE TO HIGH FLEXIBILITY.

TWO FLAT SURFACES ARE PROVIDED FOR ANY DECAL APPLICATION NEEDED.


MAY REQUIRE A SMALL PILOT HOLE IN CERTAIN SOIL CONDITIONS BEFORE INSTALLATION.

ENGINEERING GRADE VINYL GREEN WITH WHITE LETTERS

HEAT ACTIVATED

10' U-CHANNEL POST 3 LB.

INSTALL WHERE INSTRUCTED BY ENGINEER

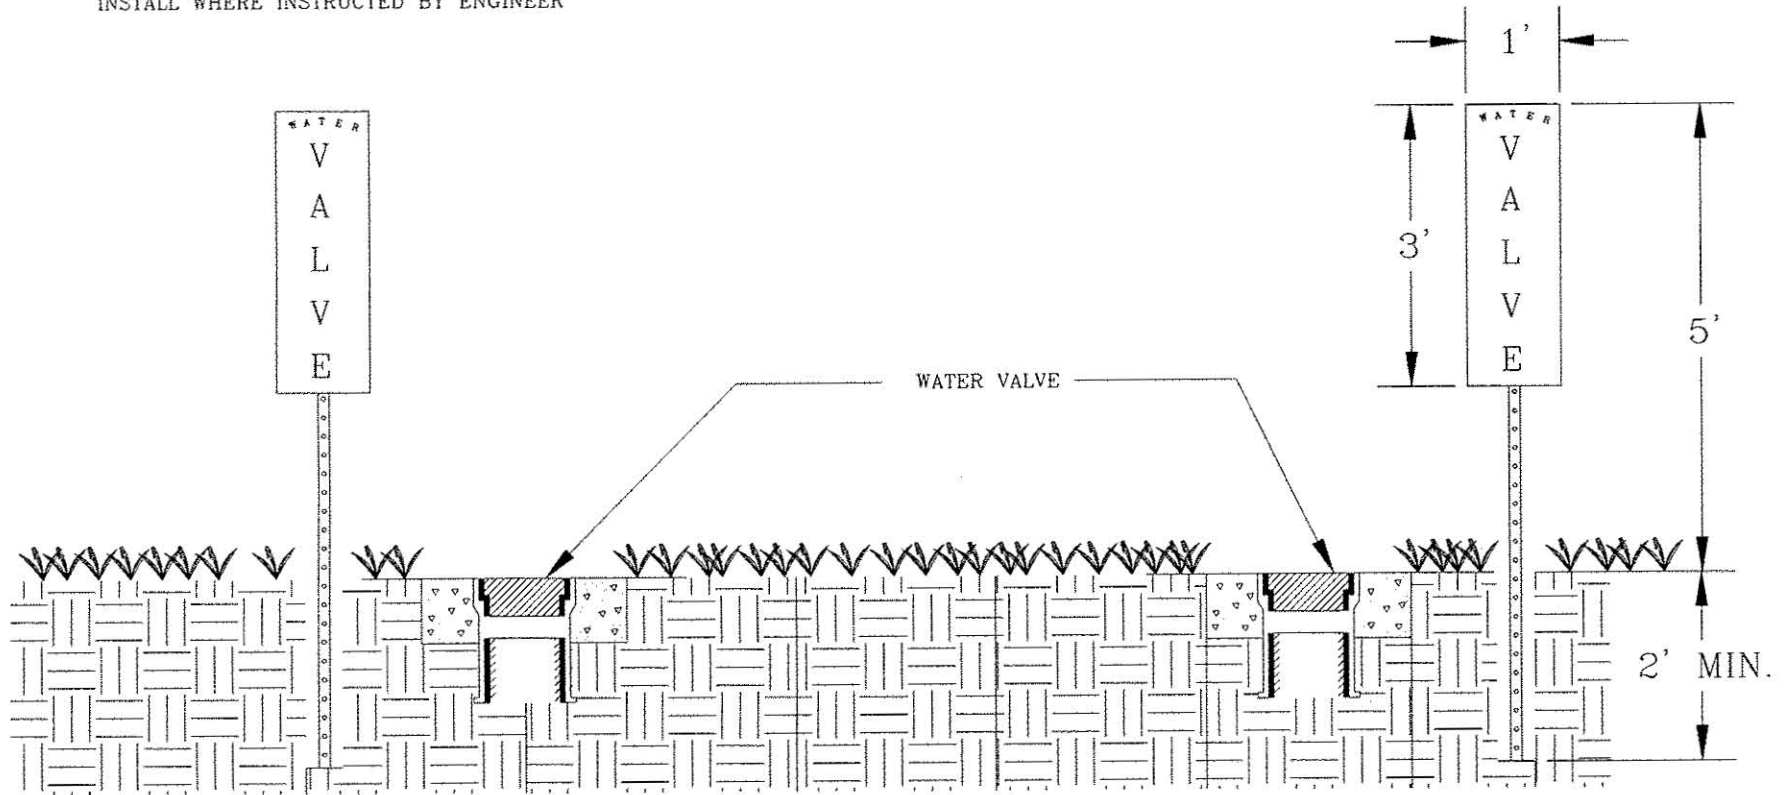

VALVE MARKER

CITY OF ROCKY MOUNT
DEPT. OF ENGINEERING

REVISIONS		
NO	DATE	DESCRIPTION

APPROVED	STD. NO.
	1.15
DATE	REVISION
08-27-08	