


HAY BALES ARE NOT AN ACCEPTABLE ALTERNATIVE TO SILT FENCING.

TOP AND BOTTOM STRAND SHALL BE 10 GAUGE MIN.

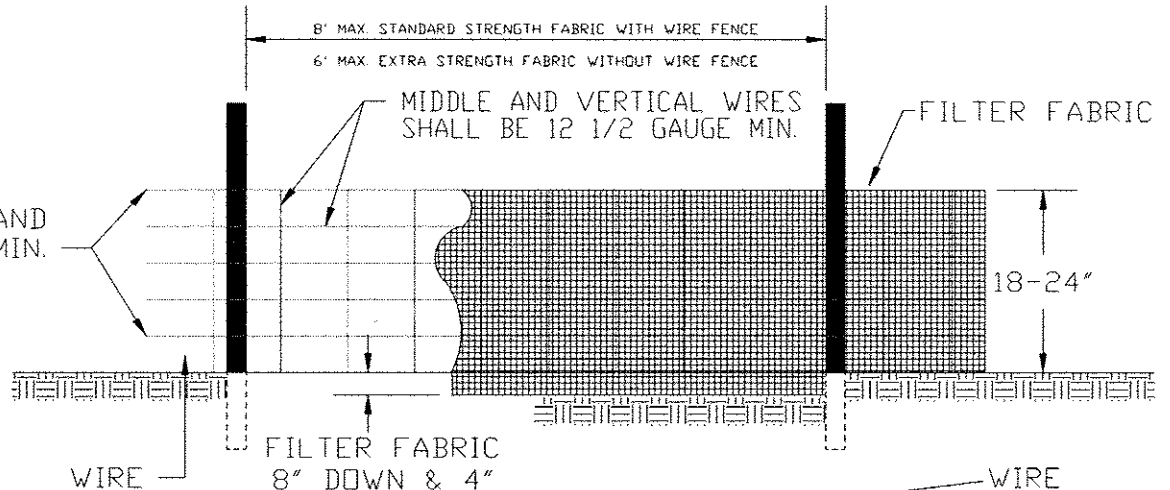

NOTES:

WIRE SHALL BE A MINIMUM OF 32" IN WIDTH AND SHALL HAVE A MINIMUM OF 6 LINE WIRES WITH 12" STAY SPACING.

FILTER FABRIC SHALL BE A MINIMUM OF 36" IN WIDTH, SHALL MEET THE REQUIREMENTS OF NCDOT SSRS SECTION 1056 FOR TYPE 3, CLASS A FILTER FABRIC, AND SHALL BE FASTENED ADEQUATELY TO THE WIRE AS DIRECTED BY THE ENGINEER.

STEEL POST SHALL BE 5'-0" IN HEIGHT AND BE OF THE SELF-FASTNER ANGLE STEEL TYPE.

WOOD POST SILT FENCE IS NOT AN ACCEPTABLE ALTERNATIVE.

WIRE


FILTER FABRIC 8" DOWN & 4" FORWARD ALONG THE TRENCH

FILTER FABRIC
 COMPACTED FILL

WIRE

STEEL POST

SYMBOL

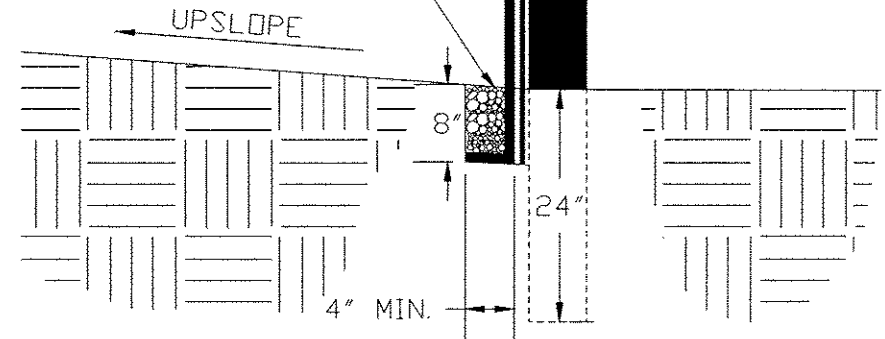

EXTENSION OF FABRIC AND WIRE INTO FABRIC

TEMPORARY SEDIMENT (SILT) FENCE

CITY OF ROCKY MOUNT
 DEPT. OF ENGINEERING

APPROVED

-

DATE

06-26-07

STD. NO.

3.3

REVISION

-

REVISIONS		
NO	DATE	DESCRIPTION