


NOTE: FRONT OF MAIL BOX SHOULD BE PERPENDICULAR WITH BACK OF CURB AND GUTTER.

THE SUPPORT STRUCTURE FOR THE MAILBOX MUST BE CONSTRUCTED OF WOOD, BRICK, STONE, CONCRETE, MASONRY, STEEL OR ANY OTHER SIMILAR HARD, HEAVY, AND PERMANENT MATERIAL. ANY MAILBOX, LAMP POST, FENCE, OR SIMILAR STRUCTURE OF WOOD, PLASTIC, OR LIGHTWEIGHT METAL, EIGHT INCHES (8") OR LESS IN DIAMETER, OF A SIZE, DESIGN, OR TYPE DESIGNED AND CONSTRUCTED TO COLLAPSE, BREAKAWAY, OR GO OVER UPON IMPACT WITH A MOTOR VEHICLE, IS NOT A RIGHT-OF-WAY STRUCTURE.

THE SUPPORT STRUCTURE SHALL NOT BE BURIED BELOW THE GROUND GREATER THAN 48-INCHES OR ANCHORED IN CONCRETE OR OTHER SUCH MATERIAL AS TO PREVENT COLLAPSE UNLESS THE SUPPORT IS SO DESIGNED TO BREAK AWAY AT GROUND LEVEL UPON IMPACT.

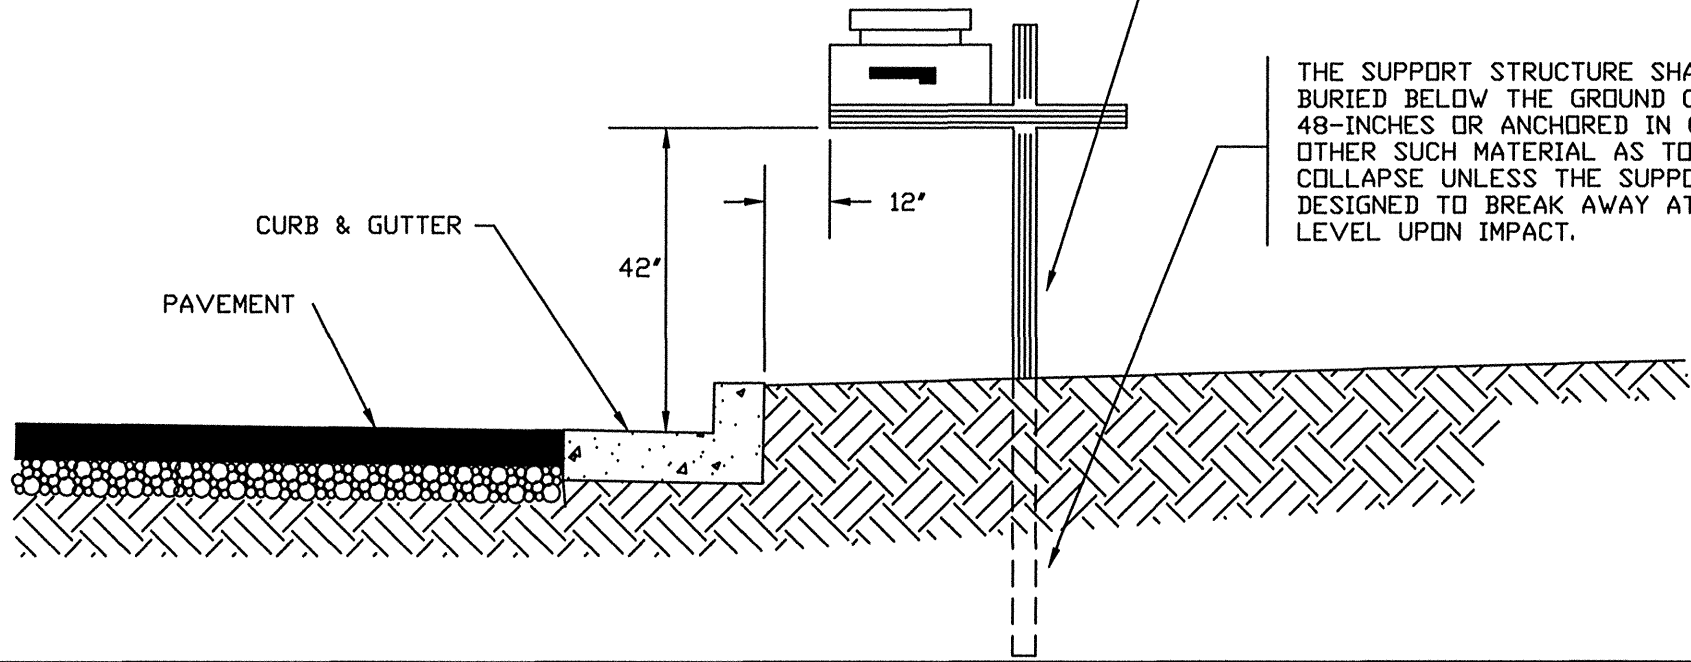

## STANDARD MAIL BOX PLACEMENT FOR CURB & GUTTER STREETS

REVISIONS		
NO	DATE	DESCRIPTION

CITY OF ROCKY MOUNT  
DEPT. OF ENGINEERING

APPROVED	-
DATE	01-29-03

STD. NO.	7.4
REVISION	-